

FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE (REV. 1094)

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET
NUMBER
C1043/7032

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/857698

INTERNATIONAL APPLICATION NO.
PCT/GB99/04050

INTERNATIONAL FILING DATE
7 December 1999 (07.12.99)

PRIORITY DATE CLAIMED
08 December 1998 (08.12.98)

TITLE OF INVENTION
DISPLAY DEVICES

APPLICANT(S) FOR DO/EO/US

BERGER, Paul; BURROUGHS, Jeremy Henley; CARTER, Julian Charles; HEEKS, Stephen Karl

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(C)(5)).


Items 11. To 16. Below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment (with amended claims).
 ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification (submitted as a first Preliminary Amendment).
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
Mailed via Express Mailing Label No. EL711250241US
Published Application with Search Report
Post Card

Mailing Date: June 8, 2001

Express Mail Label No. EL711250241US

U.S. APPLICATION NO (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION PCT/GB99/04050		ATTORNEY'S DOCKET NUMBER C1043/7032	
17. <input checked="" type="checkbox"/> The following fees are submitted:		CALCULATIONS <small>PTO USE ONLY</small>			
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):					
Search Report has been prepared by the EPO or JPO		\$860.00			
International preliminary examination fee paid to USPTO (37 CFR 1.482)		\$690.00			
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))..		\$760.00			
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....		\$1000.00			
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)		\$100.00			
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than ~ 20 X 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	35 - 20 =	15	X \$18.00	\$ 270.00	
Independent Claims	3 - 3 =	0	X \$80.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+\$260.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$1130.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$1130.00	
Processing fee of \$130.00 for furnishing the English translation later than ~ 20 ~ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$1130.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate coversheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED =				\$1130.00	
				Amount to be: refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$1130.00 to cover the above fees is enclosed.					
b. Please charge by Deposit Account No. _____ In the amount of \$ _____ To cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23/2825. A duplicate of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO					
Therese A. Hendricks WOLF, GREENFIELD & SACKS, P.C. 600 Atlantic Avenue Boston, Massachusetts 02210			 SIGNATURE Therese A. Hendricks NAME 30,389 REGISTRATION NO		
CUSTOMER NO. 23628					



PATENT
Customer No. 22,852
Attorney Docket No. 08513.7032-00000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
Berger et al.) Group Art Unit: unknown
Serial No.: 09/857,698) Examiner: unknown
Filed: June 8, 2001)
For: DISPLAY DEVICES)

Assistant Commissioner for Patents
Washington, DC 20231

PRELIMINARY AMENDMENT

Prior to the examination of the above application, please amend this application
as follows:

IN THE SPECIFICATION:

On page 1, after the title and before the first paragraph, please add the following:

Related Applications

This application is a national stage filing of PCT/GB99/04050 having an
international filing date of 7 December 1999, which claims priority on GB 9827014.3
filed 8 December 1998 and GB 9901334.4 filed 21 January 1999.

Background of the Invention

LAW OFFICES

NNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, DC 20005
202-408-4000

On page 2, before the first paragraph please add the subheading -- Summary of the Invention --;

On page 7, before the third full paragraph, please add the subheading -- Brief Description of the Drawings;

On page 7, before the last paragraph, please add the subheading -- Detailed Description --


REMARKS

If there is any fee due in connection with the filing of this Preliminary Amendment, please charge the fee to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

Dated: October 9, 2001

By: 
Therese A. Hendricks
Reg. No. 30,389

ATTORNEY'S DOCKET NO: C1043/7032

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Paul Berger et al.
Serial No: --
Filed: Herewith
For: DISPLAY DEVICES

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Please amend the above application as follows to conform the specification with U.S. practice.

In The Specification

On page 8, line 18, please delete the symbol “*/Ø” and substitute the following symbol “Ω / □”

In the Abstract

Please add the following Abstract (also attached on a separate sheet at the end of this preliminary amendment):

-- A light-emissive device comprising: a light-emissive region (12); a first electrode (10) located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and a second-electrode (11) located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type; and wherein there is a reflectivity-influencing structure (13) located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal. --

In The Claims

Please delete claim 36.

Please rewrite the claims as shown.

1. A light-emissive device comprising:
 - a light-emissive region;
 - a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and
 - a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;
 - and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal.

2. A light-emissive device as claimed in claim 1, wherein the first electrode is at least partially light-transmissive.

3. (amended) A light-emissive device as claimed in claim 1, wherein the reflectivity influencing structure is located on the opposite side of the second electrode from the light-emissive region.

4. A light-emissive device as claimed in claim 3, wherein the second electrode is at least partially light-transmissive.

5. (amended) A light-emissive device as claimed in claim 3, wherein the thickness of the second electrode is less than 30nm.

6. (amended) A light-emissive device as claimed in claim 3, wherein the reflectivity-influencing structure is adjacent the second electrode.

7. (amended) A light-emissive device as claimed in claim 1, wherein the second electrode provides the reflectivity-influencing structure.

8. A light-emissive device as claimed in claim 7, wherein the second electrode comprises a fluoride or oxide of a low work function metal.

9. A light-emissive device as claimed in claim 8, wherein the second electrode comprises aluminium.

10. (amended) A light-emissive device as claimed in claim 1, wherein the reflectivity-influencing structure is effective to absorb light emitted from the light-emissive region that reaches it through the second electrode and/or incident light.

11. (amended) A light-emissive device as claimed in claim 7, wherein the presence of the reflectivity-influencing structure adjacent the second electrode renders the second electrode substantially non-reflective to light emitted from the light-emissive region and/or incident light.

12. (amended) A light-emissive device as claimed in claim 1, wherein the second electrode comprises an electrically conductive material.

13. (amended) A light-emissive device as claimed in claim 1, wherein the light-emissive layer comprises an organic light-emissive material.

14. (amended) A light-emissive device as claimed in claim 1, wherein the light-emissive layer comprises a polymer light-emissive material.

15. (amended) A light-emissive device as claimed in claim 1, wherein the light-emissive layer comprises a conjugated polymer material.

16. (amended) A light-emissive device as claimed in claim 1, wherein the reflection-influencing layer is electrically conductive.

17. A light-emissive device comprising:

a light-emissive region;

a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and

a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;

and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light-reflective layer and a light-transmissive spacing layer between the second electrode and the light-reflective layer, the thickness of the spacing layer being such as to space a reflective plane of the light-reflective layer by approximately half the wavelength of the optical mode of the device from at least part of the light-emissive region.

18. A light-emissive device as claimed in claim 17, wherein the said part of the light-emissive region is a part at which, when the device is in operation, there is significant electron/hole recombination.

19. (amended) A light-emissive device as claimed in claim 18, wherein the said part of the light-emissive region is a principal region for electron/hole recombination.

20. (amended) A light-emissive device as claimed in claim 17, wherein the said plane of the light-reflective layer is the major surface of the light-reflective layer that is closer to the light-emissive region.

21. (amended) A light-emissive device as claimed in claim 17, wherein the second electrode comprises an electrically conductive material.

22. (amended) A light-emissive device as claimed in claim 17, wherein the light-emissive layer comprises an organic light-emissive material.

23. (amended) A light-emissive device as claimed in claim 17, wherein the light-emissive layer comprises a polymer light-emissive material.

24. (amended) A light-emissive device as claimed in claim 17, wherein the light-emissive layer comprises a conjugated polymer material.

25. (amended) A light-emissive device as claimed in claim 17, wherein the reflection-influencing layer is electrically conductive.

26. A light-emissive device comprising:

- a light-emissive region;
- a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and
- a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;
- and a contrast enhancing structure located on the non-viewing side of the light-emissive region and including a reflective structure having different reflectivity for different wavelengths of incident light, and having a reflectivity peak encompassing an emission wavelength of the light-emissive region.

27. A light-emissive device as claimed in claim 26, wherein the reflective structure is a distributed Bragg reflector.

28. (amended) A light-emissive device as claimed in claim 26, wherein the second electrode comprises a layer located on the non-viewing side of the reflective structure and a plurality of through paths passing through the reflective structure for electrical conduction between the said layer of the second electrode and the light-emissive region.

29. A light-emissive device as claimed in claim 28, wherein the through paths occupy less than 15% of the emissive area of the device.

30. (amended) A light-emissive device as claimed in claim 26, wherein the cathode comprises a transparent layer located between the reflective structure and the light-emissive region.

31. (amended) A light-emissive device as claimed in claim 30, wherein the transparent layer is in contact with the through paths.

32. (amended) A light-emissive device as claimed in claim 26, wherein the second electrode comprises an electrically conductive material.

33. (amended) A light-emissive device as claimed in claim 26, wherein the light-emissive layer comprises an organic light-emissive material.

34. (amended) A light-emissive device as claimed in claim 26, wherein the light-emissive layer comprises a polymer light-emissive material.

35. (amended) A light-emissive device as claimed in claim 26, wherein the light-emissive layer comprises a conjugated polymer material.

Respectfully Submitted,



Therese A. Hendricks
Reg. No. 30,389
Wolf, Greenfield & Sacks, P.C.
600 Atlantic Avenue
Boston, MA 02210-2211
(617)720-3500

Date: June 8, 2001
Docket No. C1043/7032

09867594-1091
TUESDAY 06/11/01 13:59:29

ABSTRACT

A light-emissive device comprising: a light-emissive region (12); a first electrode (10) located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and a second-electrode (11) located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type; and wherein there is a reflectivity-influencing structure (13) located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal.

FOUO - 8692550

09/857698
531 Rec'd PC 08 JUN 2001

WO 00/35028

PCT/GB99/04050

8

material. The anode electrode is formed of transparent ITO. The cathode electrode is formed of calcium. The cathode is sufficiently thin that it is not significantly reflective. Behind the cathode is a layer 13 of carbon. When a suitable voltage is applied across the electrodes light is emitted from the light-emissive material substantially omnidirectionally. Some of the light is emitted forwards towards the anode and passes directly out of the device through the anode. Some of the light is emitted backwards towards the cathode. Incident light that shines on to the display from an external source can be absorbed by the carbon layer 13. Because this light is absorbed it does not reflect back towards a viewer - this can improve the effect produced by the display, as described in detail below.

The device of figure 2 may be formed starting with a commercially-available glass sheet coated with ITO. The glass sheet (14 in figure 2) forms the substrate for subsequent deposition steps. The glass sheet could be a sheet of sodalime or borosilicate glass of a thickness of, for instance, 1mm. Instead of glass other materials such as Perspex could be used. The thickness of the ITO coating is suitably around 100 to 150nm and the ITO suitably has a sheet resistance of between 10 and 30 Ω/\square . Over the ITO anode is deposited a hole transport or injecting layer 15. The hole transport layer is formed from a solution containing PEDOT:PSS with a ratio of PEDOT to PSS of around 1 to 5. The thickness of the hole transport layer is suitably around 50nm. The hole transport layer is spin-coated from solution and then baked typically at 200°C for 1 hour in a nitrogen environment. Then an electroluminescent layer 12 comprising 20% TFB in 5BTF8 is coated over the hole transport layer by spin-coating typically to a thickness of 90nm. The term 5BTF8 refers to poly (2,7-(9,9-di-n-octylfluorene) ("F8") doped with 5% poly-(2,7-(9,9-di-n-octylfluorene)-3,6-benzothiadiazole) ("F8BT"). Then a transparent or semitransparent layer of a low work function material such as calcium is thermally evaporated on to the electroluminescent layer in vacuo at a base pressure of less than 10^{-8} mbar to form the cathode layer 11. The thickness of this layer is preferably greater than around 1nm but less than the thickness at which the calcium layer would be non-transparent - typically around 20nm. Over

The symbol
 "*/ \square " should read " Ω/\square ".

09/857698
531 Rec'd PCT. 08 JUN 2001

WO 00/35028

PCT/GB99/04050

16

CLAIMS

1. A light-emissive device comprising:
a light-emissive region;
a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and
a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;
and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal.
2. A light-emissive device, as claimed in claim 1, wherein the first electrode is at least partially light-transmissive.
3. A light-emissive device as claimed in claim 1 [or 2], wherein the reflectivity influencing structure is located on the opposite side of the second electrode from the light-emissive region.
4. A light-emissive device as claimed in claim 3, wherein the second electrode is at least partially light-transmissive.
5. A light-emissive device as claimed in claim 3 [or 4], wherein the thickness of the second electrode is less than 30nm.
6. A light-emissive device as claimed in [any of claims 3 to 5], wherein the reflectivity-influencing structure is adjacent the second electrode.
7. A light-emissive device as claimed in claim 1 [or 2], wherein the second electrode provides the reflectivity-influencing structure.

claim 3

WO 00/35028

PCT/GB99/04050

17

8. A light-emissive device as claimed in claim 7, wherein the second electrode comprises a fluoride or oxide of a low work function metal.

9. A light-emissive device as claimed in claim 8, wherein the second electrode comprises aluminium.

10. A light-emissive device as claimed in ¹[any preceding] claim, wherein the reflectivity-influencing structure is effective to absorb light emitted from the light-emissive region that reaches it through the second electrode and/or incident light.

11. A light-emissive device as claimed in ^{claim 1}[any of claims 7 to 10 as dependant directly or indirectly on claim 6], wherein the presence of the reflectivity-influencing structure adjacent the second electrode renders the second electrode substantially non-reflective to light emitted from the light-emissive region and/or incident light.

12. A light-emissive device as claimed in ¹[any preceding] claim, wherein the second electrode comprises an electrically conductive material.

13. A light-emissive device as claimed in ¹[any preceding] claim, wherein the light-emissive layer comprises an organic light-emissive material.

14. A light-emissive device as claimed in ¹[any preceding] claim, wherein the light-emissive layer comprises a polymer light-emissive material.

15. A light-emissive device as claimed in ¹[any preceding] claim, wherein the light-emissive layer comprises a conjugated polymer material.

16. A light-emissive device as claimed in ¹[any preceding] claim, wherein the reflection-influencing layer is electrically conductive.

17. A light-emissive device comprising:

WO 00/35028

PCT/GB99/04050

18

a light-emissive region;
a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and
a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;
and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light-reflective layer and a light-transmissive spacing layer between the second electrode and the light-reflective layer, the thickness of the spacing layer being such as to space a reflective plane of the light-reflective layer by approximately half the wavelength of the optical mode of the device from at least part of the light-emissive region.

18. A light-emissive device as claimed in claim 17, wherein the said part of the light-emissive region is a part at which, when the device is in operation, there is significant electron/hole recombination.

19. A light-emissive device as claimed in claim 18, wherein the said part of the light-emissive region is a principal region for electron/hole recombination.

20. A light-emissive device as claimed in claim 17 [any of claims 17 to 19] wherein the said plane of the light-reflective layer is the major surface of the light-reflective layer that is closer to the light-emissive region.

21. A light-emissive device as claimed in claim 17 [any of claims 17 to 20], wherein the second electrode comprises an electrically conductive material.

22. A light-emissive device as claimed in claim 17 [any of claims 17 to 21], wherein the light-emissive layer comprises an organic light-emissive material.

23. A light-emissive device as claimed in claim 17 [any of claims 17 to 22], wherein the light-emissive layer comprises a polymer light-emissive material.

WO 00/35028

PCT/GB99/04050

19

24. A light-emissive device as claimed in any of claims 17 to 23, wherein the light-emissive layer comprises a conjugated polymer material.

claim 17

25. A light-emissive device as claimed in any of claims 17 to 24, wherein the reflection-influencing layer is electrically conductive.

claim 17

26. A light-emissive device comprising:

a light-emissive region;

a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and

a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;
and a contrast enhancing structure located on the non-viewing side of the light-emissive region and including a reflective structure having different reflectivity for different wavelengths of incident light, and having a reflectivity peak encompassing an emission wavelength of the light-emissive region.

27. A light-emissive device as claimed in claim 26, wherein the reflective structure is a distributed Bragg reflector.

28. A light-emissive device as claimed in claim 26 or 27, wherein the second electrode comprises a layer located on the non-viewing side of the reflective structure and a plurality of through paths passing through the reflective structure for electrical conduction between the said layer of the second electrode and the light-emissive region.

29. A light-emissive device as claimed in claim 28, wherein the through paths occupy less than 15% of the emissive area of the device.

30. A light-emissive device as claimed in any of claims 26 to 29, wherein the cathode comprises a transparent layer located between the reflective structure and the light-emissive region.

claim 26

WO 00/35028

PCT/GB99/04050

20

31. A light-emissive device as claimed in claim 30 ^{claim 26} [as dependant on claim 28 or 29], wherein the transparent layer is in contact with the through paths.

32. A light-emissive device as claimed in [any of claims 26 to 31] ^{claim 26}, wherein the second electrode comprises an electrically conductive material.

33. A light-emissive device as claimed in [any of claims 26 to 32] ^{claim 26}, wherein the light-emissive layer comprises an organic light-emissive material.

34. A light-emissive device as claimed in [any of claims 26 to 33] ^{claim 26}, wherein the light-emissive layer comprises a polymer light-emissive material.

35. A light-emissive device as claimed in [any of claims 26 to 34] ^{claim 26}, wherein the light-emissive layer comprises a conjugated polymer material.

36. A light-emissive device substantially as herein described with reference to figures 2 to 8 of the accompanying drawings. ^{deleted}

3/PRTS

09/857698

531 Rec'd PCT

08 JUN 2001

WO 00/35028

PCT/GB99/04050

DISPLAY DEVICES

This invention relates to display devices.

One specific class of display devices is those that use an organic material for light emission. Light-emissive organic materials are described in PCT/WO90/13148 and US 4,539,507, the contents of both of which are incorporated herein by reference. The basic structure of these devices is a light-emissive organic layer, for instance a film of a poly(p-phenylenevinylene ("PPV")), sandwiched between two electrodes. One of the electrodes (the cathode) injects negative charge carriers (electrons) and the other electrode (the anode) injects positive charge carriers (holes). The electrons and holes combine in the organic layer generating photons. In PCT/WO90/13148 the organic light-emissive material is a polymer. In US 4,539,507 the organic light-emissive material is of the class known as small molecule materials, such as (8-hydroxyquinoline)aluminium ("Alq3"). In a practical device one of the electrodes is typically transparent, to allow the photons to escape the device.

Figure 1 shows the typical cross-sectional structure of an organic light-emissive device ("OLED"). The OLED is typically fabricated on a glass or plastic substrate 1 coated with a transparent first electrode 2 such as indium-tin-oxide ("ITO"). Such coated substrates are commercially available. This ITO-coated substrate is covered with at least a layer of a thin film of an electroluminescent organic material 3 and a final layer forming a second electrode 4, which is typically a metal or alloy. Other layers can be added to the device, for example to improve charge transport between the electrodes and the electroluminescent material.

If light that is incident on the display can be reflected back towards a viewer, especially from the region of pixels that are intended to appear dark, then the apparent contrast between the pixels of the display can be reduced. This reduces the effectiveness of the display.

WO 00/35028

PCT/GB99/04050

2

Many display devices are used in applications where power consumption is a crucial consideration - examples are battery-powered devices such as portable computers and mobile phones. There is therefore a drive to improve the efficiency of display devices.

According to one aspect of the present invention there is provided a light-emissive device comprising: a light-emissive region; a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type; and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal.

According to a second aspect of the present invention there is provided a light-emissive device comprising: a light-emissive region; a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type; and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light-reflective layer and a light-transmissive spacing layer between the second electrode and the light-reflective layer, the thickness of the spacing layer being such as to space a reflective plane of the light-reflective layer by approximately half the wavelength of the optical mode of the device from at least part of the light-emissive region.

The first electrode is preferably at least partially light-transmissive, most preferably substantially transparent, at least to light of some or all of the wavelengths that can be emitted from the device. The first electrode could, for example, be formed of ITO (indium-tin oxide), TO (tin oxide) or gold. The first electrode is preferably disposed in a viewing direction from the light-emissive

WO 00/35028

PCT/GB99/04050

3

region - that is between the light-emissive region and an expected location of a viewer. The first electrode may be in the form of a layer. Where the device includes more than one pixel more than one first electrode could be provided to allow (in co-operation with the second electrode) each pixel to be individually addressed.

The second electrode may be at least partially light-transmissive, suitably substantially transparent, at least to light of some or all of the wavelengths that can be emitted from the device. This could be achieved by forming the second electrode from a light-transmissive material and/or by the second electrode being relatively thin, for example less than 2, 5, 10, 20 or 30nm in thickness. Suitable materials for the second electrode include lithium, calcium and ITO. Alternatively, the second electrode could be reflective or non-reflective/light absorbent. In that case, the second electrode preferably itself provides the reflectivity-influencing structure. Where the second electrode is light-absorbent it could be formed of a light-absorbent materials such as a fluoride or oxides of a low work function metal such as Li, Ca, Mg, Cs, Ba, Yb, Sm etc. (together, optionally, with a conductive material such as Al, which could be co-deposited with the oxide or fluoride), or of a low work function metal incorporating and preferably co-deposited with a light-absorbent material such as carbon (graphite). The said low work function metal may have a work function below 4.0eV. The said low work function metal may have a work function below 3.5eV. The said low work function metal may have a work function below 3.2eV. The said low work function metal may have a work function below 3.0eV. A suitable range of thickness for the second electrode is in the range from 50 to 1000nm, preferably from 100 to 300 nm.

The first electrode and/or the second electrode preferably comprise electrically conductive material, for example metallic material. One of the electrodes (the hole-injecting electrode) preferably has a work function of greater than 4.3 eV. That layer may comprise a metallic oxide such as indium-tin oxide ("ITO") or tin oxide ("TO") or a high work function metal such as Au or Pt. This may be the first electrode or the second electrode. The other electrode (the electron-injecting

WO 00/35028

PCT/GB99/04050

4

electrode) preferably has a work function less than 3.5 eV. That layer may suitably be made of a metal with a low work function (Ca, Ba, Yb, Sm, Li etc.) or an alloy or multi-layer structure comprising one or more of such metals together optionally with other metals (e.g. Al). This may be the second electrode or the first electrode. The rear electrode is preferably at least partially light-absorbent. This may be achieved by incorporating a layer of light-absorbent material such as carbon in the electrode. Such material is preferably also electrically conductive.

The reflectivity-influencing structure could be located adjacent the second electrode. The reflectivity-influencing structure then suitably influences the reflectivity of the rear (non-viewing side) of the device, being (for example) substantially light-absorbent or substantially light-reflective. The reflectivity-influencing structure may include distinct substantially light-absorbent and substantially light-reflective areas.

In the first aspect of the invention the reflectivity-influencing structure may comprise a light-absorbent layer. Such a layer is suitably for reducing reflection by or through the second electrode of light emitted from the light-emissive region and/or absorbing light that has been transmitted through the second electrode and/or absorbing light that is incident on the device from another source. Such a light-absorbent layer is preferably located adjacent to the second electrode; alternatively the light-absorbent layer could be spaced from the second electrode, for example by an insulating material. The presence of the reflectivity-influencing structure adjacent or more generally behind the second electrode suitably renders the second electrode substantially non-reflective to light emitted from the light-emissive region. Such a light-absorbent layer is preferably formed from a light-absorbent material - for example the light-absorbent layer of the reflectivity-influencing structure could comprise graphite. Where the device comprises a plurality of individual pixels the light-absorbent layer is preferably common to a plurality of pixels.

WO 00/35028

PCT/GB99/04050

5

In the second aspect of the invention the reflectivity-influencing structure may comprise a light-reflective layer. Such a layer is suitably for influencing the coincidence within the device of the optical field (e.g. an anti-node of the optical field) and a part of the light-emissive region. Such a part of the light-emissive region is suitably a region at which there is some or significant electron/hole recombination (preferably to generate photons). The said part is preferably a principal recombination site or plane of the light-emissive layer. The said part is most preferably the peak recombination site or plane of the device. The reflectivity-influencing structure preferably comprises a light-transmissive spacing layer between the second electrode and such a light-reflective layer, suitably for spacing the light-reflective layer from the light-emissive layer and preferably by a predetermined spacing. The spacing layer could be provided by material integral with the second electrode itself - for example by virtue of the thickness of the second electrode. The thickness of the spacer is preferably such as to space a reflector of the reflection-influencing structure from at least part of the light-emissive region by approximately half the wavelength of the optical mode of the device. That reflector may be one of the major surfaces of the reflective layer (those closer to and further from the light-emissive layer) or may be a reflective structure (such as a distributed Bragg reflector) defined by the reflective layer. The thickness of the spacer is most preferably such as to space the reflector by approximately or substantially half the wavelength of the optical mode of the device from the region of the light-emissive region at which the optical field is approximately or substantially at its peak.

The light-absorbent or light-reflecting layers mentioned above of the reflection-influencing structure are preferably in optical communication with the light-emissive layer of the device so that light from the light-emissive layer may reach the light-absorbent or light-reflecting layers.

The reflection-influencing structure is preferably electrically conductive, suitably to permit electrical contact to be made to the second electrode through the reflection influencing structure.

WO 00/35028

PCT/GB99/04050

6

According to a third aspect of the present invention there is provided a light-emissive device comprising: a light-emissive region; a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type; and a contrast enhancing structure located on the non-viewing side of the light-emissive region and including a reflective structure having different reflectivity for different wavelengths of incident light, and having a reflectivity peak encompassing an emission wavelength of the light-emissive region. In this aspect of the invention the reflective structure is suitably a distributed Bragg reflector. In this aspect of the invention the second electrode suitably comprises a layer located on the non-viewing side of the reflective structure and a plurality of through paths passing through the reflective structure for electrical conduction between the said layer of the second electrode and the light-emissive region. The through paths preferably occupy less than 15% or less than 10% of the emissive area of the device. The through paths may occupy between 15% and 5% of the emissive area of the device. In this aspect of the invention the cathode may comprise a transparent layer located between the reflective structure and the light-emissive region. That transparent layer may be in contact with the through paths.

In general, the light-emissive material is suitably an organic material and preferably a polymer material. The light-emissive material is preferably a semiconductive and/or conjugated polymer material. Alternatively the light-emissive material could be of other types, for example sublimed small molecule films or inorganic light-emissive material. The or each organic light-emissive material may comprise one or more individual organic materials, suitably polymers, preferably fully or partially conjugated polymers. Example materials include one or more of the following in any combination: poly(p-phenylenevinylene) ("PPV"), poly(2-methoxy-5(2'-ethyl)hexyloxyphenylenevinylene) ("MEH-PPV"), one or more PPV-derivatives (e.g. di-alkoxy or di-alkyl derivatives), polyfluorenes and/or co-polymers incorporating polyfluorene

WO 00/35028

PCT/GB99/04050

7

segments, PPVs and related co-polymers, poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-secbutylphenyl)imino)-1,4-phenylene)) ("TFB"), poly(2,7-(9,9-di-n-octylfluorene) - (1,4-phenylene-((4-methylphenyl)imino)-1,4-phenylene-((4-methylphenyl)imino) - 1,4-phenylene)) ("PFM"), poly(2,7 - (9,9 - di-n-octylfluorene) - (1,4-phenylene-((4-methoxyphenyl)imino)-1,4-phenylene- ((4-methoxyphenyl)imino)-1,4-phenylene)) ("PFMO"), poly (2,7-(9,9-di-n-octylfluorene) ("F8") or (2,7-(9,9-di-n-octylfluorene)-3,6-Benzothiadiazole) ("F8BT"). Alternative materials include small molecule materials such as Alq3.

One or more charge-transport layers may be provided between the light-emissive region and one or both of the electrodes. The or each charge transport layer may suitably comprise one or more polymers such as polystyrene sulphonic acid doped polyethylene dioxythiophene ("PEDOT-PSS"), poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-(4-imino(benzoic acid))-1,4-phenylene-(4-imino(benzoic acid))-1,4-phenylene)) ("BFA"), polyaniline and PPV.

Any implied physical orientation of the device is not necessarily related to its physical orientation during use or manufacture.

The present invention will now be described by way of example with reference to the accompanying drawings, in which:

- figure 2 is a cross-section of a first device;
- figure 3 is a plan view of a second device;
- figure 4 is a cross-section of the device of figure 3 on the line A-A'; and
- figure 5 is a cross-section of a third device;
- figure 6 is a plan view of a fourth device;
- figure 7 is a cross-section of the fourth device; and
- figure 8 shows the reflectivity of a DBR against wavelength.

The figures are not to scale.

The device of figure 2 comprises an anode electrode layer 10, and a cathode electrode 11. Located between the electrode layers is a layer 12 of light-emissive

WO 00/35028

PCT/GB99/04050

8

material. The anode electrode is formed of transparent ITO. The cathode electrode is formed of calcium. The cathode is sufficiently thin that it is not significantly reflective. Behind the cathode is a layer 13 of carbon. When a suitable voltage is applied across the electrodes light is emitted from the light-emissive material substantially omnidirectionally. Some of the light is emitted forwards towards the anode and passes directly out of the device through the anode. Some of the light is emitted backwards towards the cathode. Incident light that shines on to the display from an external source can be absorbed by the carbon layer 13. Because this light is absorbed it does not reflect back towards a viewer - this can improve the effect produced by the display, as described in detail below.

The device of figure 2 may be formed starting with a commercially-available glass sheet coated with ITO. The glass sheet (14 in figure 2) forms the substrate for subsequent deposition steps. The glass sheet could be a sheet of sodalime or borosilicate glass of a thickness of, for instance, 1mm. Instead of glass other materials such as Perspex could be used. The thickness of the ITO coating is suitably around 100 to 150nm and the ITO suitably has a sheet resistance of between 10 and 30 Ω/\square . Over the ITO anode is deposited a hole transport or injecting layer 15. The hole transport layer is formed from a solution containing PEDOT:PSS with a ratio of PEDOT to PSS of around 1 to 5. The thickness of the hole transport layer is suitably around 50nm. The hole transport layer is spin-coated from solution and then baked typically at 200°C for 1 hour in a nitrogen environment. Then an electroluminescent layer 12 comprising 20% TFB in 5BTF8 is coated over the hole transport layer by spin-coating typically to a thickness of 90nm. The term 5BTF8 refers to poly (2,7-(9,9-di-n-octylfluorene) ("F8") doped with 5% poly-(2,7-(9,9-di-n-octylfluorene)-3,6-benzothiadiazole) ("F8BT"). Then a transparent or semitransparent layer of a low work function material such as calcium is thermally evaporated on to the electroluminescent layer in vacuo at a base pressure of less than 10^{-8} mbar to form the cathode layer 11. The thickness of this layer is preferably greater than around 1nm but less than the thickness at which the calcium layer would be non-transparent - typically around 20nm. Over

TOP SECRET

WO 00/35028

PCT/GB99/04050

9

this layer is deposited by electron beam evaporation a layer 13 of carbon with a thickness of between 100 and 500nm at base pressures less than 10^{-8} mbar. On this layer is deposited by sputter deposition a layer 16 of aluminium with a thickness of between 100 and 1000nm at base pressures less than 10^{-8} mbar. In this embodiment the low work function layer 11 is chosen to act as an efficient electron injector for injecting electrons into the light-emissive region. The carbon layer 13 acts as a light-absorbing layer yet has a conductivity that is low enough not to significantly increase the drive voltage of the device. The sputtered aluminium layer 16 acts as an encapsulant, having a compact morphology with low pinhole density and small grain size. Contacts can be attached to the device (between layers 16 and 10) and it can finally be sealed in epoxy resin for environmental protection.

Figures 3 and 4 show a multi-pixel display device that makes use of the principle described above in connection with the device of figure 2. The device of figures 3 and 4 comprises a set of parallel anode electrode strips 20 in a common anode plane and a set of parallel cathode electrode strips 21 in a common cathode plane spaced from the anode plane. Between the anode and cathode electrodes is a light-emissive layer 22. The areas where anode and cathode electrode strips overlap define pixels of the display device. By using a passive matrix addressing scheme individual pixels can be caused to emit light. (The device could alternatively be configured to allow active matrix or other addressing schemes to be used). Figure 4 shows that each cathode electrode comprises three layers: an injection layer 75 of a low work function material such as calcium adjacent to the emissive layer 22, an intermediate layer 76 of a light-absorbent material such as carbon (graphite) and a conduction layer 77 of a highly conductive material such as aluminium. Together these make up a cathode plane 81. In general, the injection layer is suitably of a material that has good properties of injection into the light-emissive layer 22; the intermediate layer is suitably of a material that has good light-absorbency properties and the conduction layer is of a highly conductive material. The conduction layer may be significantly thicker than the other layers and preferably helps to distribute charge evenly along the electrode

WO 00/35028

PCT/GB99/04050

10

structure. Where the material chosen for one of the layers can also perform the function of another layer then that other layer could be omitted. For instance, if the selected light emissive material were one into which good charge injection could be achieved from carbon then the layer 75 could be omitted, and/or if the layers 75 and/or 76 provided adequate conduction then the layer 77 could be omitted. The light absorbent layer 76 preferably lies between the other two layers (where present), in which case it should be electrically conductive, but it could lie behind the other two layers. Alternatively, or in addition, a light absorbent layer covering the whole structure could be provided (layer 29 in figure 4). If that layer were of a conductive material such as carbon then an insulating layer 23 could be provided to prevent shorting between the cathode strips 21.

The effect of the light-absorbent layer 76 is to absorb light that is incident on the display and could otherwise be reflected from the display causing a reduction in contrast. This is illustrated by light rays 80 in figure 4, which are absorbed by layers 23 and 29. The light-absorbent layer therefore helps to increase contrast. The light-absorbent layer may also help to reduce transmission within the device itself of light emitted from the light-emissive layer 22. This can help to increase contrast by avoiding such light emerging from the device at a location where it appears to come from a different pixel from the one from which it was emitted.

One of the contacts from the display driver is applied to the layer 77.

A carbon layer or other non-reflective layer could also be provided in front of the light-emissive layer 22 in the lateral spaces between the pixels to further reduce reflection of ambient light.

The principles described above in relation to the devices of figures 2 to 4 can therefore improve contrast between adjacent pixels of a device and improve the pattern of light emission from a single pixel by reducing emission of more obliquely angled light and reducing reflection of ambient light.

WO 00/35028

PCT/GB99/04050

11

Figure 5 shows another display device. The device of figure 5 comprises an anode electrode layer 40, and a cathode electrode 41. Located between the electrode layers is a layer 42 of light-emissive material. The anode electrode and the cathode electrode are formed of transparent ITO. Alternatively, for example, the electrodes could be formed from a thin layer of a low work function metal such as calcium adjacent to an transparent spacing layer formed from a material such as ITO, ZnSe, ZnS etc.). When a suitable voltage is applied across the electrodes light is emitted from the light-emissive material substantially omnidirectionally. Some of the light is emitted forwards towards the anode and passes directly out of the device through the anode. Some of the light is emitted backwards towards the cathode, through which it passes into a reflection structure indicated generally at 43. The reflection structure comprises a reflective layer 44 and a transparent spacing layer 46. The spacing layer lies between the cathode 41 and the reflective layer 44 and spaces the reflective layer from the light-emissive region 42. The reflective layer reflects backwardly emitted light forwards so that it can pass back through the cathode electrode 41, the light-emissive layer 42 the anode electrode 40 and the glass substrate 47 and out of the device (see ray 48).

In figure 5 curve 49 illustrates the form of the optical field and region 50 illustrates the zone in the device at which electron/hole recombination to generate photons is most intense. The equivalent features are illustrated at 60 and 61 respectively for the device of figure 1. The thickness of the spacing layer in the device of figure 5 is ideally chosen so that the plane (or one of the planes) of the reflective layer 44 that acts to return backwardly emitted light is spaced from the emissive layer by a distance such that at at least one emission frequency of the device the peak of the optical mode of the whole reflective arrangement (see curve 49) coincides with the region of peak electron/hole recombination in the light-emissive layer of the device. The effect of this is to arrange that the area of light generation in the device is at a more efficient plane of the device of figure 5 than in the device of figure 1, by tuning the peak of the optical field (anti-node) to coincide with the hole/electron recombination zone of the emissive layer. This optimises (or at least partially optimises) the location for efficient light generation for a given

WO 00/35028

PCT/GB99/04050

12

wavelength. The wavelength for which the device is optimised preferably is or is near the peak intensity emission wavelength. This ideal arrangement calls for very precise spacing of the respective layers; however, considerable benefits can be gained by arranging the layers approximately or substantially in that way.

The device of figure 5 may be formed by a similar route to that described above for the device of figure 2 up to the formation of the cathode electrode. Then for the device of figure 5 the spacing layer 46 is formed by depositing ITO, ZnSe, ZnS or the like to the required thickness, preferably on top of a thin layer of a low work-function metal such as calcium. Over the ITO spacing layer the reflective layer 44 is formed from reflective material such as aluminium. In an alternative embodiment a conducting dielectric stack next to or spaced from the cathode could be used as the reflector. Such a stack could be formed, for example, of alternating layers of ITO and NiO.

In another alternative embodiment, one of the electrodes could be formed of a reflectivity influencing material. The anode or the cathode could be reflective or non-reflective (light-absorbent). This could be achieved by choosing a material with the desired reflectivity properties and the preferred charge conduction and injection properties. An electrically suitable material could be treated (e.g. by surface treatment or incorporation into it of a reflectivity influencing additive) to obtain the desired reflectivity properties.

One specific example is for the rear electrode (the one furthest from a viewer) to be non-reflective. In a device arranged generally as those in figures 1 to 5, this calls for a non-reflective cathode. (In other devices the anode may be the rear electrode). One suitable material for a reflective or non-reflective cathode is LiF:Al. When the Al component of a LiF:Al film is greater than 50% the LiF:Al films are reflective. When the Al component is between 50% and 30% the films are non-reflective. When the Al component is <30% the films are semi-transparent but also have very high resistivities. Therefore, in the range 50:50 to 70:30 LiF:Al LiF:Al films are useful for making a black (non-reflective) cathode.

WO 00/35028

PCT/GB99/04050

13

An example device having a non-reflective rear electrode (in this case the cathode) can be manufactured as follows. On to a glass substrate a 150nm thick layer of ITO is deposited to act as an anode electrode. Then a 50nm thick layer of PEDOT/PSS is deposited to act as a hole transport layer. Over that an 80nm thick layer of a polyfluorene based electroluminescent polymer is formed. Finally the non-reflective cathode layer is deposited as a 200nm thick layer of co-evaporated LiF and Al, with the LiF:Al evaporation rates being 60:40. On top of this layer a 400nm thick Al layer is deposited. In varying this specific design of device it should be noted that the range of potential thickness for the LiF:Al layer depends on the composition since the greater the proportion of LiF in the layer the more transparent the layer becomes. For layers of composition 60:40 LiF:Al 200nm is just thick enough. A suitable range of thickness is from 50 to 1000nm.

Alternative non-reflective cathode materials include generally fluorides and oxides of low work function metals such as Li, Ca, Mg, Cs, preferably together with an inherently highly conductive metal such as Al or Cu (although in some situations Cu may be less preferred because of its tendency to quench polymers' electroluminescence). Specific examples include CsF, MgF, CaF, LiO, CaO, which could be co-evaporated with Al or sputtered from a composite target including Al. The required ratios of the conductor (Al) with the insulating fluorides and oxides can easily be determined by experimentation in each case but might be expected to be similar to those discussed for the LiF:Al system above. Another alternative route to a low reflectivity or non-reflective cathode is to co-evaporate or sputter a low work function material with carbon. Examples include the low work function metals Ca, Li etc and also the fluorides and oxides listed above.

Figure 6 is a plan view and figure 7 a cross-sectional view of another alternative device. The device comprises an anode electrode 60, a hole transport layer 62, a cathode electrode 63, a light-emissive layer 64 and a distributed Bragg reflector (DBR) layer 65. The DBR is located on the non-viewing side of the light-emissive

WO 00/35028

PCT/GB99/04050

14

layer. The bulk (66) of the cathode 63 is located on the non-viewing side of the DBR. To allow charge to pass from the bulk of the cathode to the light-emissive region cathode vias 67 are provided through the DBR. The vias occupy a relatively small proportion of the area of the device: for example around 15% to 5%. To even out charge injection into the emissive layer a further layer 68 of the cathode which is sufficiently thin to be transparent is provided between the DBR and the light-emitting region. If the DBR were conductive, or the vias were closely spaced, or uniformity could otherwise be achieved then the layer 68 could be omitted. The mesh-like arrangement of vias (see figure 6) could be formed by means of deposition through a shadow mask.

A DBR comprises of a stack of regularly alternating higher- and lower-refractive index dielectrics (light transmissive materials) fabricated to fulfil the Bragg condition for reflection at particular wavelengths. This occurs when the optical path of the periodicity in the dielectric stack corresponds to half a wavelength, and the reflectivity is further optimised when the DBR stack obeys the following equation:

$$\frac{1}{2} \lambda = n_1 d_1 + n_2 d_2,$$

where n_1 , n_2 are the respective refractive indices; d_1 , d_2 are the corresponding component film thicknesses in the DBR; and λ is the desired reflection wavelength. Figure 8 shows the reflectivity of a DBR against wavelength, the reflectivity peaking at that optimum and being much lower for other wavelengths.

In the device of figures 6 and 7 the DBR is arranged so that the emission wavelength of the light-emissive layer (or its principal emission wavelength) lies within the reflectivity peak of the DBR, and most preferably at or near the maximum reflectivity of the DBR. The effect of this is that the DBR can act to increase the contrast of the device without significantly reducing its efficiency. Light emitted rearwards from the light-emissive layer is reflected efficiently (e.g. with around 95% to 100% reflectivity) back towards a viewer by the DBR. Incident light that is not at or near the emission wavelength of the light-emitting layer, and therefore not within the reflectivity peak of the DBR, is reflected much less (e.g.

WO 00/35028

PCT/GB99/04050

15

only 5% to 10%) and tends to be absorbed by the DBR, improving the contrast of the device. The peaky reflectivity of the DBR may also serve to enhance colour purity of the emission from the device.

The vias may be reflective to a range of wavelengths, so it is preferred to minimise the area occupied by the vias, for example to below 15% and preferably below 10%.

Some variations on the devices described above will now be described. In any of the devices one or more charge transport layers (e.g. layers 15, 70, 71) may be formed between the light-emissive layer and either or both of the electrodes to assist charge transport between the respective electrode and the light-emissive layer and/or to resist charge transport in the opposite direction. The principles described above could be applied to other types of organic or inorganic display devices. One specific alternative example is the class of display devices that use sublimed molecular films for light emission, as described for example in "Organic Electroluminescent Diodes", C. W. Tang and S. A. VanSlyke, Appl. Phys. Lett. 51, 913-915 (1987). The locations of the electrodes could be reversed so that the cathode is located at the front of the display (closest to the viewer) and the anode is at the back. Other materials or classes of materials could be used instead of those mentioned above, although this may impair performance of the devices.

The applicant draws attention to the fact that the present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof, without limitation to the scope of any of the present claims. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

WO 00/35028

PCT/GB99/04050

16

CLAIMS

1. A light-emissive device comprising:
 - a light-emissive region;
 - a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and
 - a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light absorbent layer comprising graphite and/or a fluoride or oxide of a low work function metal.
2. A light-emissive device, as claimed in claim 1, wherein the first electrode is at least partially light-transmissive.
3. A light-emissive device as claimed in claim 1 or 2, wherein the reflectivity influencing structure is located on the opposite side of the second electrode from the light-emissive region.
4. A light-emissive device as claimed in claim 3, wherein the second electrode is at least partially light-transmissive.
5. A light-emissive device as claimed in claim 3 or 4, wherein the thickness of the second electrode is less than 30nm.
6. A light-emissive device as claimed in any of claims 3 to 5, wherein the reflectivity-influencing structure is adjacent the second electrode.
7. A light-emissive device as claimed in claim 1 or 2, wherein the second electrode provides the reflectivity-influencing structure.

PCT/GB99/04050

8. A light-emissive device as claimed in claim 7, wherein the second electrode comprises a fluoride or oxide of a low work function metal.

9. A light-emissive device as claimed in claim 8, wherein the second electrode comprises aluminium.

10. A light-emissive device as claimed in any preceding claim, wherein the reflectivity-influencing structure is effective to absorb light emitted from the light-emissive region that reaches it through the second electrode and/or incident light.

11. A light-emissive device as claimed in any of claims 7 to 10 as dependant directly or indirectly on claim 6, wherein the presence of the reflectivity-influencing structure adjacent the second electrode renders the second electrode substantially non-reflective to light emitted from the light-emissive region and/or incident light.

12. A light-emissive device as claimed in any preceding claim, wherein the second electrode comprises an electrically conductive material.

13. A light-emissive device as claimed in any preceding claim, wherein the light-emissive layer comprises an organic light-emissive material.

14. A light-emissive device as claimed in any preceding claim, wherein the light-emissive layer comprises a polymeric light-emissive material.

15. A light-emissive device as claimed in any preceding claim, wherein the light-emissive layer comprises a conjugated polymer material.

16. A light-emissive device as claimed in any preceding claim, wherein the reflection-influencing layer is electrically conductive.

17. A light-emissive device comprising:

WO 00/35028

PCT/GB99/04050

18

a light-emissive region;

a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and

a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;

and wherein there is a reflectivity-influencing structure located on the non-viewing side of the light-emissive region and including a light-reflective layer and a light-transmissive spacing layer between the second electrode and the light-reflective layer, the thickness of the spacing layer being such as to space a reflective plane of the light-reflective layer by approximately half the wavelength of the optical mode of the device from at least part of the light-emissive region.

18. A light-emissive device as claimed in claim 17, wherein the said part of the light-emissive region is a part at which, when the device is in operation, there is significant electron/hole recombination.

19. A light-emissive device as claimed in claim 18, wherein the said part of the light-emissive region is a principal region for electron/hole recombination.

20. A light-emissive device as claimed in any of claims 17 to 19, wherein the said plane of the light-reflective layer is the major surface of the light-reflective layer that is closer to the light-emissive region.

21. A light-emissive device as claimed in any of claims 17 to 20, wherein the second electrode comprises an electrically conductive material.

22. A light-emissive device as claimed in any of claims 17 to 21, wherein the light-emissive layer comprises an organic light-emissive material.

23. A light-emissive device as claimed in any of claims 17 to 22, wherein the light-emissive layer comprises a polymer light-emissive material.

WO 00/35028

PCT/GB99/04050

19

24. A light-emissive device as claimed in any of claims 17 to 23, wherein the light-emissive layer comprises a conjugated polymer material.

25. A light-emissive device as claimed in any of claims 17 to 24, wherein the reflection-influencing layer is electrically conductive.

26. A light-emissive device comprising:

a light-emissive region;

a first electrode located on a viewing side of the light-emissive region for injecting charge carriers of a first type; and

a second electrode located on a non-viewing side of the light-emissive region for injecting charge carriers of a second type;

and a contrast enhancing structure located on the non-viewing side of the light-emissive region and including a reflective structure having different reflectivity for different wavelengths of incident light, and having a reflectivity peak encompassing an emission wavelength of the light-emissive region.

27. A light-emissive device as claimed in claim 26, wherein the reflective structure is a distributed Bragg reflector.

28. A light-emissive device as claimed in claim 26 or 27, wherein the second electrode comprises a layer located on the non-viewing side of the reflective structure and a plurality of through paths passing through the reflective structure for electrical conduction between the said layer of the second electrode and the light-emissive region.

29. A light-emissive device as claimed in claim 28, wherein the through paths occupy less than 15% of the emissive area of the device.

30. A light-emissive device as claimed in any of claims 26 to 29, wherein the cathode comprises a transparent layer located between the reflective structure and the light-emissive region.

WO 00/35028

PCT/GB99/04050

20

31. A light-emissive device as claimed in claim 30, as dependant on claim 28 or 29, wherein the transparent layer is in contact with the through paths.

32. A light-emissive device as claimed in any of claims 26 to 31, wherein the second electrode comprises an electrically conductive material.

33. A light-emissive device as claimed in any of claims 26 to 32, wherein the light-emissive layer comprises an organic light-emissive material.

34. A light-emissive device as claimed in any of claims 26 to 33, wherein the light-emissive layer comprises a polymer light-emissive material.

35. A light-emissive device as claimed in any of claims 26 to 34, wherein the light-emissive layer comprises a conjugated polymer material.

36. A light-emissive device substantially as herein described with reference to figures 2 to 8 of the accompanying drawings.

T0601-804050

09/857698

WO 00/35028

PCT/GB99/04050

1/3

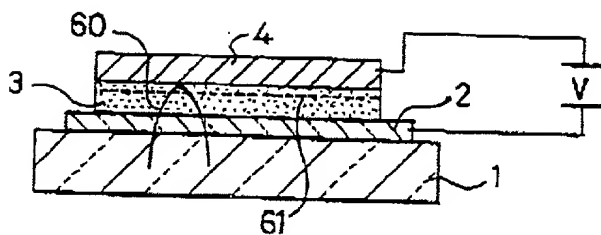


Fig. 1

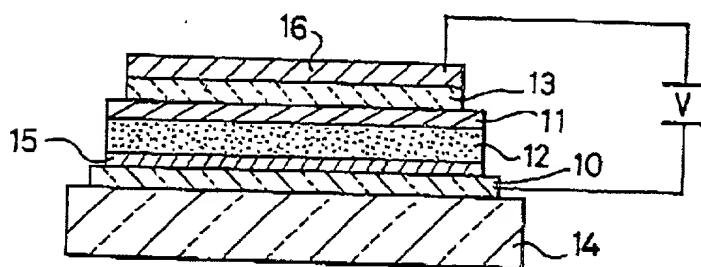


Fig. 2

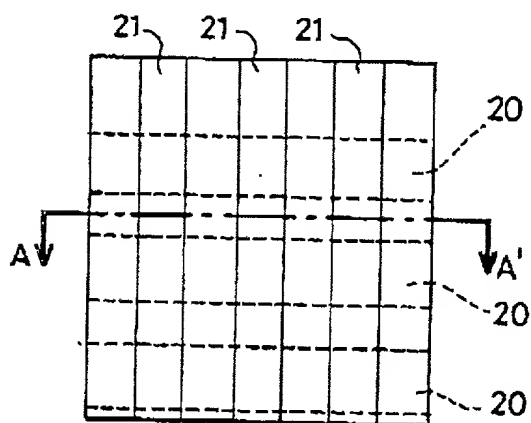


Fig. 3

SUBSTITUTE SHEET (RULE 26)

09/857698

WO 00/35028

PCT/GB99/04050

3/3

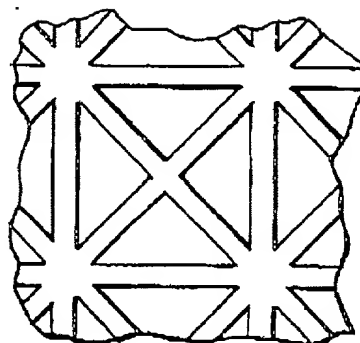


Fig. 6

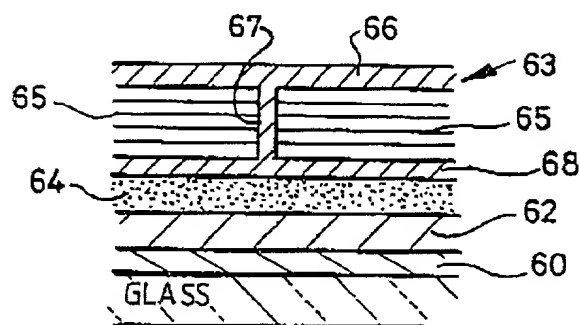


Fig. 7


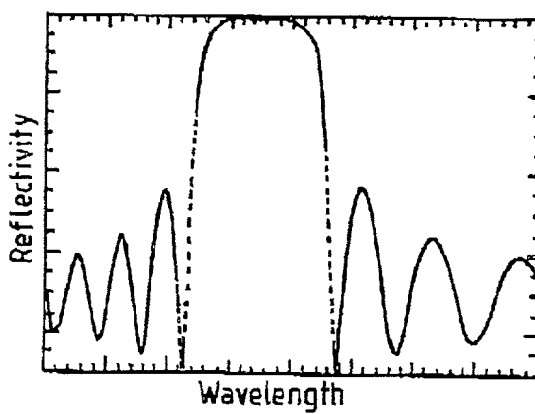


Fig. 8

SUBSTITUTE SHEET (RULE 26)



Customer Number 22,852
Attorney Docket No. 08513.7032.00000

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: DISPLAY DEVICES the specification of which was filed on June 8, 2001 as United States Application Serial No. 09/857,698.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
GB	9827014.3	8 December 1998	X YES <input type="checkbox"/> NO
GB	9901334.4	21 January 1999	X YES <input type="checkbox"/> NO
PCT	PCT/GB99/04050	7 December 1999	X YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:


Application Number	Date of Filing

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, CUSTOMER NUMBER 22,852. Douglas B. Henderson, Reg. No. 20,294; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Andrew Chanhon Sonu, Reg. No. 33,457; David S. Forman, Reg. No. 33,694; Vincent P. Kovalick, Reg. No. 32,867; James W. Edmondson, Reg. No. 33,871; Michael R. McGurk, Reg. No. 32,045; Joann M. Neth, Reg. No. 36,363; Gerson S. Panitch, Reg. No. 33,751; Cheri M. Taylor, Reg. No. 33,216; Charles E. Van Horn, Reg. No. 40,266; Linda A. Wadler, Reg. No. 33,218; Jeffrey A. Berkowitz, Reg. No. 36,743; Michael R. Kelly, Reg. No. 33,921; James B. Monroe, Reg. No. 33,971; Doris Johnson Hines, Reg. No. 34,629; Allen R. Jensen, Reg. No. 28,224; Lori Ann Johnson, Reg. No. 34,498; David A. Manspeizer, Reg. No. 37,540; Therese A. Hendricks, Reg. No. 30,389; M. Lawrence Oliverio, Reg. No. 30,915; Christopher S. Schultz, Reg. No. 37,929. Please address all correspondence to Therese A. Hendricks, **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

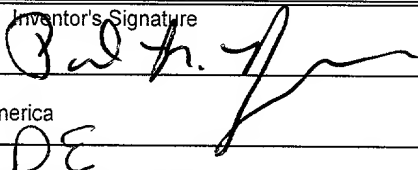Full Name of First Inventor Paul Berger	Inventor's Signature 	Date Aug 8, 2001
Residence 17 West Ridge Court, Newark, DE 19711, United States of America		Citizenship US
Post Office Address Same		
Full Name of Second Inventor Jeremy Henley Burroughes	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Third Inventor Julian Charles Carter	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Fourth Inventor Stephen Karl Heeks	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		



Full Name of First Inventor Paul Berger	Inventor's Signature	Date
Residence 17 West Ridge Court, Newark, DE 19711, United States of America		Citizenship US
Post Office Address Same		
Full Name of Second Inventor Jeremy Henley Burroughes	Inventor's Signature <i>[Signature]</i>	Date 9/8/01
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Third Inventor Julian Charles Carter	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Fourth Inventor Stephen Karl Heeks	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ, United Kingdom		Citizenship GB
Post Office Address Same		

Full Name of First Inventor Paul Berger	Inventor's Signature	Date
Residence 17 West Ridge Court, Newark, DE 19711, United States of America		Citizenship US
Post Office Address Same		
Full Name of Second Inventor Jeremy Henley Burroughes	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Third Inventor Julian Charles Carter	Inventor's Signature <i>J. Carter</i>	Date 22 nd August 2007
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Fourth Inventor Stephen Karl Heeks	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		

Full Name of First Inventor Paul Berger	Inventor's Signature	Date
Residence 17 West Ridge Court, Newark, DE 19711, United States of America		Citizenship US
Post Office Address Same		
Full Name of Second Inventor Jeremy Henley Burroughes	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Third Inventor Julian Charles Carter	Inventor's Signature	Date
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		
Full Name of Fourth Inventor Stephen Karl Heeks	Inventor's Signature 	Date 2/8/2001
Residence c/o Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 OHJ, United Kingdom		Citizenship GB
Post Office Address Same		